


Drain-Cocks OMNI

Frain-cock with hose quick coupling and plug

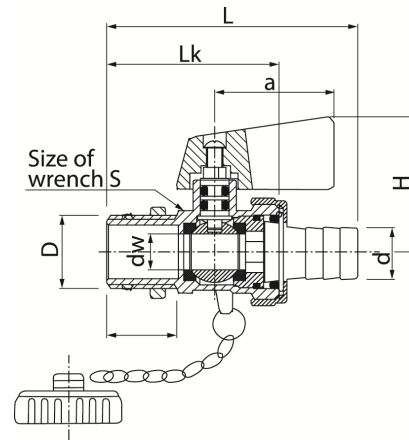

| DN | Code | Dimensions | | | | | | | | | | EAN13 |
|----|---------|------------|------|----|----|----|----|----|----|----|----|---------------|
| | | Size | D | I | dw | L | Lk | d | a | H | S | |
| 15 | 1582280 | 1/2" | G1/2 | 15 | 10 | 72 | 50 | 15 | 34 | 35 | 23 | 5907451927298 |
| 20 | 1583280 | 3/4" | G3/4 | 17 | 15 | 84 | 55 | 20 | 34 | 40 | 30 | 5907451951903 |

Product usage:

In cold and hot water systems and central heating systems as shut off valves

Type:

Discharge valves

Technical data/Operating parameters:

Max pressure: 1,0 MPa,
Max temperature: 95°C

Guarantee:

25-year

Used materials:

Nickel plated drain-cock with hose quick coupling and plug

Finish:

body, nut: nickel; ball: chrome