


## Connectors TWIST

Straight shot blasted connector with o-ring (short version), tail piece

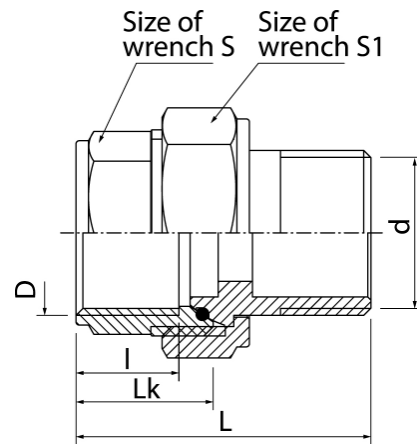

DN	Code	Dimensions								EAN13
		Size	D	d	L	Lk	l	S	S1	
15	4912050	1/2"	Rp1/2	R1/2	43	19	12	24	30	5907451905494
20	9024040	3/4"	Rp3/4	R3/4	49	22	14	32	38	5907451905500
25	9024060	1"	Rp1	R1	54	24	16	40	46	5907451905517
32	9024080	1 1/4"	Rp1 1/4	R1 1/4	65,5	30	23	52	56	5907451905524
40	9024100	1 1/2"	Rp1 1/2	R1 1/2	67	31	23	58	64	5907451905531
50	9024120	2"	Rp2	R2	77	36,5	27,5	70	76	5907451905548

### Product usage:

In the piping systems of cold and hot water and central heating for connecting pipes with each other or with any other part of the installation

### Type:

Fittings

### Technical data/Operating parameters:

Max pressure: 1,0 MPa,  
Max temperature: 100°C

### Guarantee:

25-year

### Used materials:

body, nut, connector end piece: brass;  
sealing: O-ring seal.

### Finish:

body, nut, connector  
end piece: brass