


Connectors TWIST

Shot blasted female-male reducing coupling connector

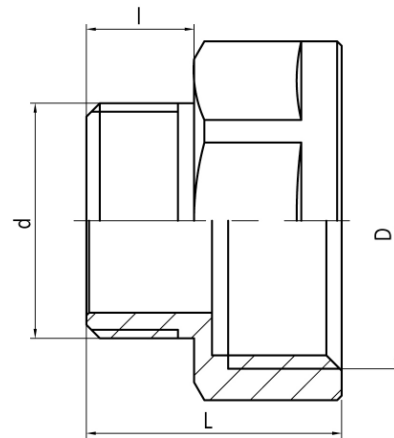

Code	Dimensions						EAN13
	Size	D	d	D1	L	S	
6031010	3/8"-1/2"	G1/2	G3/8		25,5	24	5907451945049
6032010	1/2"-3/8"	G3/8	G1/2		21,5	21	5907451945087
6033010	1/2"-3/4"	G3/4	G1/2		24,5	30	5907451945056
6035010	3/4"-1/2"	G1/2	G3/4		25	27	5907451945094
6036010	3/4"-1"	G1	G3/4		28,5	36	5907451945070
6037010	1"-3/4"	G3/4	G1		27	34	5907451945100

Product usage:

For use in piping systems of cold and hot water and central heating for connecting of pipes with each other or with any other part of the installation.

Type:

Fittings

Technical data/Operating parameters:

Max pressure: 1,0 MPa,
Max temperature: 100°C

Guarantee:

25-year

Used materials:

brass

Finish:

brass