
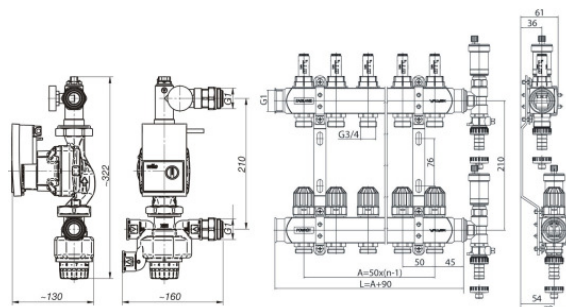


Manifold set BASE with compact mixing shunt PROFF

Manifold set BASE K5 with compact mixing shunt PROFF

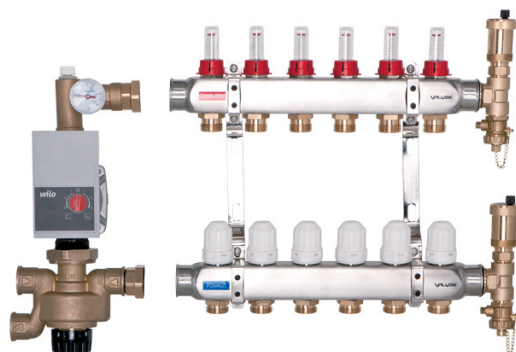

Code	Dimensions				EAN13
	Size	K(x)-n	A	L	
6088650	G1-G3/4	K5-2	50	140	5907451986707
6088660	G1-G3/4	K5-3	100	190	5907451993088
6088670	G1-G3/4	K5-4	150	240	5907451993095
6088680	G1-G3/4	K5-5	200	290	5907451993125
6088690	G1-G3/4	K5-6	250	340	5907451993132
6088700	G1-G3/4	K5-7	300	390	5907451993149
6088710	G1-G3/4	K5-8	350	440	5907451993156
6088720	G1-G3/4	K5-9	400	490	5907451996331
6088730	G1-G3/4	K5-10	450	540	5902273500995
6088740	G1-G3/4	K5-11	500	590	5902273501008
6088750	G1-G3/4	K5-12	550	640	5902273501015

Product usage:

For use in piping systems of cold and hot water and radiator and space central heating

Type:

Manifold set with compact mixing shunt

Guarantee:

2-year

Technical data/Operating parameters:

Max pressure: 0,6 MPa,
Max temperature: 70°C

Used materials:

four-port valve, 90° elbow, reducing connectors, fittings, connection rings with O-ring G1/2-3/4, flow meter G1/2, thermostatic valve G1/2, safety group for manifold: brass; manifold pipe: steel; bracket set: galvanized steel; seals: EPDM; circulating pump: Wilo

Finish:

four-port valve, 90° elbow, reducing connectors, fittings, plug, connection ring and safety group for manifold: brass manifold pipe: stainless steel; bracket set: zinc plated